





INTRODUCTION

Established in 1978, Connectwell is the leading manufacturer of Terminal Blocks in India. This superior range of Terminal Blocks is complimented by a large range of Interface Modules, Surge Protection Devices and SMPS (Switched-Mode Power Supplies).

Connectwell over the years has undergone constant evolution of infrastructure, systems and personnel. This evolution is exemplified by its high quality products and a team of professionals which is always looking ahead of everyday challenges, willing to change adapt and create.

Reputed product approvals and certifications like UL, CSA, VDE, ATEX and CE and quality systems which adhere to ISO 9001:2015 verify the quality level that can be expected of Connectwell.

More than four decades of incessant dedication and commitment have made Connectwell a synonym for

... THE RIGHT CONNECTION

PRODUCT LINES

Terminal Blocks

Interface Modules

SMPS (Switched-Mode Power Supplies)

Surge Protection Devices (SPD)



VISION

Connectwell is committed to provide safe, reliable and efficient control & connection solutions in line with ever changing technology requirements. We shall...

Empower domestic and global customers with products of the highest quality standards, with a competitive edge and at superior service levels.

Create a work culture that encourages individual growth, team spirit and creativity; helping us overcome challenges and attain goals.

Deploy fair & ethical business practices for the growth of our vendors and maximize returns to our stakeholders.

Contribute towards the welfare of our community and follow environment friendly practices.

MISSION

Connectwell is dedicated to achieve customer satisfaction by, supplying the Right Product, at the Right Time and at the Right Cost.

QUALITY & SYSTEMS

At Connectwell we endeavour to keep evolving our systems in line with the latest standards and technology.

In addition to being an ISO 9001:2015 certified organization, all our business processes are mapped into various internal and customer facing IT systems, ranging from a world class ERP, CRM & PLM systems to extremely user friendly customer portal, product configurators and product website.

Our quality control laboratory has been approved for 'Witness Test Data Program' by Underwriters Laboratories (UL). This ensures that the quality testing carried out by our laboratory is not only accurate but also acceptable to the most stringent third party product testing organizations.

Connectwell products carry third part approvals from the most trusted organizations in the world, including but not being limited to UL, CSA, VDE, ATEX and CE.



INFRASTRUCTURE

From product conceptualization to realization, we are well equipped with the latest software and high precision machinery to meet the requirements of our customers.

Some of these strengths are listed below

Injection and Compression Moulding: Highly automated production floors with CNC moulding machines supported by high accuracy moulding auxiliaries ensures repeatable high quality production.

Sheet Metal Processing - Our strength in sheet metal processing lies in the ability to use high speed multi station and multi form presses to create complex metal components with a very high degree of accuracy. We also have the capability to carry out a number of post forming processes like tapping, welding etc.


Automatic Mechanical Assembly: A very large volume of our products are assembled automatically on automatic assembly lines, which also carry out 100% functional testing of these products, assuring quality and reliability.

Tool Development & Maintenance: At our state of the art production tool room we produce both sheet metal tools and plastic processing moulds at extremely high accuracy levels. In addition, a maintenance tool room supports production areas and ensures continuity of production.



Product Design & Development: Our team works on a Product Life cycle Management platform which enables easy use of various mechanical and electrical design and simulation tools in addition to being able to efficiently manage projects and engineering data.

This ensures that we are able to produce high quality products and tools in shorter time frames, allowing us to better service our customer's needs.

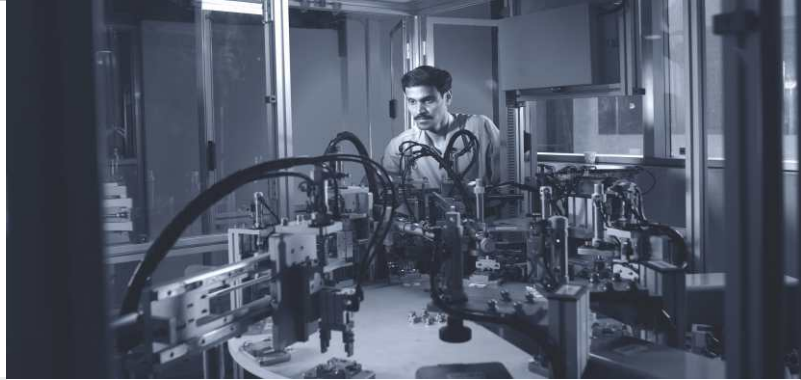

PRESENCE

Our customers range from the largest to the smallest entities in the below industries

- | Power Generation, Transmission & Utilities |
- | Oil & Gas | Industrial & Process Automation |
- | HVAC | Elevators & Escalators |
- | Material handling | Railways & Metros |
- | Ship Building & Aviation |

REACH

We serve our customers through an expansive dealer network spread across India & the globe and also through our direct offices.

In India, we have more than 150 distributors located across all major towns & cities. In addition to our distributor network, our Sales & Marketing personnel located in all major cities of India interact with customers directly, to understand and meet their requirements.

Internationally, Connectwell is present directly in China, Brazil & Middle East through its subsidiaries and personnel. In addition we reach more than 60 other countries through distributors.

Some of the reputed names who we work with regularly are listed below

- | Siemens | Emerson | Indian Railways | Honeywell |
- | Crompton Greaves | Rockwell Automation | ABB |
- | Schneider Electric | Bharat Heavy Electrical Limited |
- | Larsen & Toubro |



Established in 1978, Connectwell is one of the leading manufacturers of Terminal Blocks and Interface Modules.

Connectwell over the years has undergone constant evolution of infrastructure, systems and personnel. This evolution is exemplified by its high quality products and a team of personnel which is always looking ahead of everyday challenges, willing to change, adapt and create.




Reputed approvals and certifications like UL, CSA, VDE, ATEX and CE verify the quality levels that can be expected of Connectwell.

Three decades of incessant dedication and commitment have made Connectwell a synonym for...



THE RIGHT CONNECTION

The product range includes:


- Screw Clamp Terminal Blocks
- CY Series Terminal Blocks
- Spring Clamp Terminal Blocks
- Push-In Series Terminal Blocks
- Stud Type Terminal Blocks
- Melamine Terminal Blocks
- Ceramic Terminal Blocks
- PCB Terminal Blocks
- Interface Modules
- Professional Tools
- Switching Power Supplies
- Sockets & Switches
- Accessories

					
CTS2.5UN 45 x 43 x 5 mm 0.2 - 2.5 mm ² 24 A, 1000 V, 0.4 Nm	CTS2.5UE 45 x 43 x 6 mm 0.2 - 4.0 mm ² 30 A, 1000 V, 0.5 Nm	CTS4UN 45 x 43 x 6 mm 0.2 - 4.0 mm ² 32 A, 1000 V, 0.5 Nm	CTS6U 47 x 43 x 8 mm 0.5 - 6.0 mm ² 41 A, 1000 V, 0.8 Nm	CTS10U 47 x 43 x 10 mm 0.5 - 10.0 mm ² 57 A, 1000 V, 1.2 Nm	CTS16U 47 x 43 x 12 mm 0.2 - 16.0 mm ² 76 A, 1000 V, 1.2 Nm

Standard Feed Through Terminal Blocks

					
CMC1-2 47 x 46.5 x 6 mm 0.2 - 4.0 mm ² 32 A, 630 V, 0.5 Nm	CMC2-2 51.5 x 65 x 6 mm 0.2 - 4.0 mm ² 32 A, 630 V, 0.5 Nm	CMCG4 52 x 65 x 6 mm 0.2 - 4.0 mm ² 0.5 Nm	new ODL2.5 / ODL2.5A 59.8 x 62 x 5 mm 0.2 - 2.5 mm ² 24 A, 800 V, 0.5 Nm	new ODL2.5(I.S) / ODL2.5A(I.S) 59.8 x 62 x 5 mm 0.2 - 2.5 mm ² 24 A, 800 V, 0.5 Nm	CDL4UN 58 x 57.5 x 6 mm 0.2 - 4.0 mm ² 32 A, 800 V, 0.5 Nm

Multiple Connection Terminal Blocks

					
CTL2.5U 67 x 84 x 6 mm 0.2 - 2.5 mm ² 24 A, 500 V, 0.4 Nm	CTL2.5UH 67 x 61 x 6 mm 0.2 - 2.5 mm ² 24 A, 500 V, 0.4 Nm	CTL2.5UL 67 x 84 x 6 mm 0.2 - 2.5 mm ² 24 A, 500 V, 0.4 Nm	CTL2.5UHL 67 x 61 x 6 mm 0.2 - 2.5 mm ² 24 A, 500 V, 0.4 Nm	CTL2.5U(I.S) 67 x 84 x 6 mm 0.2 - 2.5 mm ² 24 A, 500 V, 0.4 Nm	CTLG2.5 65.2 x 87.5 x 6 mm 0.2 - 2.5 mm ² 24 A, 440 V, 0.4 Nm

Double Level Terminal Blocks

Triple Level Terminal Blocks




						
CGT50/70N 70 x 77 x 20.5 mm 10.0 - 70.0 mm ²	CGMT4 28.5 x 27 x 6 mm 0.2 - 4.0 mm ² 0.5 Nm	CENC4 30 x 23.3 x 7.5 mm 10.0 mm ² 57 A, 800 V, 0.8 Nm	CENC16 36 x 23.3 x 9.8 mm 10.0 - 16.0 mm ² 76 A, 800 V, 2.0 Nm	CENC35 45 x 27.3 x 14.5 mm 10.0 - 35.0 mm ² 125 A, 800 V, 2.5 Nm	CC8 19.5 x 48.7 x 9 mm Ø 8 mm	CC14 19.5 x 59.3 x 14 mm Ø 14 mm

Ground / Earth Terminal Blocks

Micro Ground Terminal Blocks

Neutral / Earth Clamps

Shield Connection Clamps

						
CF4U / CF4U(L)* 48 x 57 x 8 mm 0.2 - 4.0 mm ² , 6.3 A, 800 V, 0.5 Nm, Ø 5 x 20/25 mm Fuse	CF4SP / CF4SPL* 68.5 x 58.5 x 6 mm 0.2 - 4.0 mm ² , 10 A, 1000 V, 0.5 Nm, Ø 5 x 20/25 mm Fuse	CAFL4U / CAFL4UL* 55 x 76 x 9 mm 0.2 - 4.0 mm ² , 6.3 A, 1000 V, 0.5 Nm, Ø 1/4" x 1 1/4" Fuse	DDFL4U 64 x 88 x 8 mm 0.2 - 4.0 mm ² , 6.3/32 A, 800 V, 0.5 Nm, Ø 5 x 20/25 mm Fuse	DDFL4U(E)* *Fuse Blow off Indication 0.2 - 4.0 mm ² , 6.3/32 A, 800 V, 0.5 Nm, Ø 5 x 20/25 mm Fuse	DDFL4ULR 64 x 88 x 8 mm 0.2 - 4.0 mm ² , 6.3 A, 800 V, 0.5 Nm, Ø 5 x 20/25 mm Fuse	DDFL4U(E)LR 64 x 88 x 8 mm 0.2 - 4.0 mm ² , 6.3 A, 800 V, 0.5 Nm, Ø 5 x 20/25 mm Fuse

Single Level Fuse Terminal Blocks

6 - 60 V / 110 - 240 V AC or DC
* For Fusion Indication
12V / 24V / 48V / 110V / 220V AC or DC

Double Level Fuse Terminal Blocks

6 - 60 V / 110 - 240 V AC or DC
* For Fusion Indication
12V / 24V / 48V / 110V / 220V AC or DC




CTS25UN
56 x 48 x 12 mm
4.0 - 25.0 mm²
101 A, 1000 V, 2.0 Nm




CTS35UN
58 x 50.5 x 16 mm
4.0 - 35.0 mm²
125 A, 1000 V, 2.5 Nm



CTS35UNA
58 x 50.5 x 16 mm
4.0 - 35.0 mm²
125 A, 1000 V, 2.5 Nm



CTS50/70N
70 x 77 x 20.5 mm
10.0 - 70.0 mm²
192 A, 1000 V, 3.0 Nm



CTS50/70NA
70 x 77 x 20.5 mm
10.0 - 70.0 mm²
192 A, 1000 V, 3.0 Nm



CTS95/120N
82.5 x 85 x 27 mm
25.0 - 120.0 mm²
269 A, 1000 V, 6.0 Nm

Standard Feed Through Terminal Blocks



CDL4UN(I.S)
58 x 57.5 x 6 mm
0.2 - 4.0 mm²
32 A, 800 V, 0.5 Nm



ODL4U
63 x 68 x 6 mm
0.2 - 4.0 mm²
32 A, 800 V, 0.5 Nm



CDLG2.5
51 x 71.7 x 6 mm
0.2 - 2.5 mm²
24 A, 500 V, 0.4 Nm



CDLG4
58 x 57 x 6 mm
0.2 - 4 mm²
32 A, 500 V, 0.5 Nm



CDLG4(I.S)
58 x 57 x 6 mm
0.2 - 4 mm²
0.5 Nm



ODLG2.5 / ODLG2.5A
59.8 x 62 x 5 mm
0.2 - 2.5 mm²
24 A, 800 V, 0.5 Nm



ODLG2.5(I.S) / ODLG2.5A(I.S)
59.8 x 62 x 5 mm
0.2 - 2.5 mm²
24 A, 800 V, 0.5 Nm

Double Level Terminal Blocks

Double Level Ground / Earth Terminal Blocks



CGT4N
40 x 54.5 x 6 mm
0.2 - 4.0 mm²
0.4 Nm



CGT4U
48 x 43 x 6 mm
0.2 - 4.0 mm²
0.4 Nm



CGT6N
43.5 x 54.5 x 8 mm
0.2 - 6.0 mm²
0.8 Nm



CGT10N
44 x 55 x 10 mm
0.2 - 10.0 mm²
1.2 Nm



CGT16N
44 x 55 x 12 mm
0.2 - 16.0 mm²
2.0 Nm



CGT10U
50 x 45 x 10 mm
0.2 - 10.0 mm²
1.2 Nm



CGT35U
61.5 x 58 x 16 mm
2.5 - 35.0 mm²
2.8 Nm

Ground / Earth Terminal Blocks



CC20
19.5 x 75 x 21 mm
Ø 20 mm



CC35
20 x 110 x 36 mm
Ø 35 mm



CCS2X2-6
18.20 x 24 x 15 mm
Ø 2 - 6 mm



CCS3-8
18.30 x 25.50 x 13.6 mm
Ø 3 - 8 mm



CCS4-13.5
19.70 x 31 x 19.10 mm
Ø 4 - 13.5 mm




CCS10-20
26.10 x 38.7 x 24.6 mm
Ø 10 - 20 mm



CCS15-32
32 x 62.2 x 37.6 mm
Ø 15 - 32 mm


Shield Connection Clamps




CKT4U
46 x 46.3 x 6 mm
0.2 - 4.0 mm²
28 A, 800 V, 0.5 Nm



CKT4U/4
51.5 x 65 x 6 mm
0.2 - 4.0 mm²
17.5 A, 800 V, 0.5 Nm




CKT4SP
46 x 58.5 x 6 mm
0.2 - 4.0 mm²
28 A, 1000 V, 0.5 Nm




CF4SPFT
46 x 58.5 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm



CKT6U
50 x 42.5 x 8 mm
0.5 - 6.0 mm²
41 A, 1000 V, 0.8 Nm




CDTTU
57 x 63 x 8 mm
1.5 - 10.0 mm²
57 A, 800 V, 1.2 Nm




CDTTUSH
57 x 63 x 16 mm
1.5 - 10.0 mm²
10 A, 160 V, 1.2 Nm

Disconnect & Test Terminal Blocks




CDTTUFT

57 x 63 x 8 mm
1.5 - 10.0 mm²
57 A, 800 V, 1.2 Nm



CDS6U

50.4 x 82 x 8 mm
0.2 - 6.0 mm²
41 A, 800 V, 0.8 Nm




CDS6U/TS

50.4 x 82 x 8 mm
0.2 - 6.0 mm²
41 A, 630 V, 0.8 Nm




CDS6U/FT

50.4 x 82 x 8 mm
0.2 - 6.0 mm²
41 A, 1000 V, 0.8 Nm




CDS6U/SC

50.4 x 82 x 8 mm
0.2 - 6.0 mm²
41 A, 800 V, 0.8 Nm



CDB4

Input : 6 - 16 sq.mm
Output : 0.2 - 4.0 mm²
64/32 A, 800 V, 2.0 / 0.5 Nm



CDB4(1)

Input : 6 - 16 sq.mm
Output : 0.2 - 4.0 mm²
64/32 A, 800 V, 2.0 / 0.5 Nm

Disconnect & Test Terminal Blocks

Distribution Blocks



DB16

46 x 66 x 27 mm
Input: 3 x 6 - 16 mm²
Output: 4 x 2.5 - 6 mm²
76 A, 1000 V, 1.2 / 0.8 Nm



DB25

49 x 55.4 x 30.5 mm
Input: 2 x 2.5 - 25 mm²
Output: 4 x 1.5 - 10 mm²
100 A, 690 V, 3.0 / 2.0 Nm



DB35

46 x 74.5 x 27 mm
Input: 1 x 6 - 35 mm²
Output: 1 x 6 - 16 mm²
Output: 6 x 2.5 - 10 mm²
125 A, 1000 V, 6.0 / 3.0 Nm



DB70

50.4 x 74.45 x 41.6 mm
Input: 1 x 10 - 70 mm²
Output: 2 x 2.5 - 25 mm²
Output: 3 x 1.5 - 16 mm²
160 A, 1000 V, 10.0 / 2.0 Nm




PDB400

64 x 94 x 53.3 mm
Input: 1 x 35 - 120 mm²
Output: 2 x 4 - 35 mm²
Output: 3 x 2.5 - 25 mm²
Output: 4 x 1.5 - 16 mm²
250 A, 1500 V, 19.0 / 2.5 Nm



DB185

64 x 94 x 53.3 mm
Input: 1 x 35 - 120 mm²
Output: 2 x 4 - 35 mm²
Output: 3 x 2.5 - 25 mm²
Output: 4 x 1.5 - 16 mm²
353 A, 1500 V, 19.0 / 2.5 Nm




CHV4U

62 x 52 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm

Compact Distribution Blocks

High Voltage Terminal Blocks




CDTTUFTSC

57 x 63 x 8 mm
1.5 - 10.0 mm²
57 A, 800 V, 1.2 Nm




CMT4

29 x 27 x 6 mm
0.2 - 4.0 mm²
32 A, 500 V, 0.5 Nm




CMB4

28.5 x 27 x 6 mm
0.2 - 4.0 mm²
32 A, 500 V, 0.5 Nm




CCC4U

45.3 x 58.5 x 6 mm
0.2 - 4.0 mm²
*A, 1000 V, 0.5 Nm



CPF / CPFL

35 x 28 x 6 mm
6.3 A & 10 A



CPD1

35 x 28 x 6 mm
1 A



new

CIP


26 x 17.45 x 5.4 mm
10 A

Micro Terminal Blocks

Panel Mount Terminal Blocks


Component Carrier Terminal Blocks & Component Plugs

* Current Rating based on Plug used



CDL4U(E)LA

54 x 55.5 x 18 mm
0.2 - 4.0 mm², 32 A, 0.5 Nm
75 - 1000 V D.C. / 20 KA (8/20 μs)




CDL4U(E)3LA

54 x 55.5 x 18 mm
0.2 - 4.0 mm², 32 A, 0.5 Nm
90-600 V DC / 10 KA (8/20 μs)




CDL4U(E)MOV

54 x 55.5 x 12 mm
0.2 - 4.0 mm², 32 A, 0.5 Nm
30-680 V [2-6.5 KA (8/20 μs)]




CTLG2.5(E)MOV

63.5 x 87.5 x 6 mm
0.2 - 2.5 mm², 0.4 Nm
30-275 V [2-6.5 KA (8/20 μs)]



CDL4U(E)SD


54 x 55.5 x 12 mm
0.2 - 4.0 mm², 32 A, 0.5 Nm
12-160 V ~ (5 ns) / 12-48 V - (1 ns)



new

CY2.5

48.2 x 50 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V, 0.4 Nm



new

CY4

48.2 x 50 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm

Surge Suppression Terminal Blocks

(Refer our Terminal Blocks catalogue for more details)

CY Series Feed Through Terminal Blocks



new

CY4/4

49.9 x 69.7 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm



new

CYG4/3

49.9 x 58.8 x 6 mm
0.2 - 4.0 mm²



new

CYG4/4

49.9 x 69.7 x 6 mm
0.2 - 4.0 mm²



new

CYDL2.5

65 x 70.5 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V, 0.5 Nm



new

CYDL2.5(I.S)


65 x 70.5 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V, 0.5 Nm



new

CYDLG2.5

65 x 70.5 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V, 0.5 Nm




new

CYDLG2.5(I.S)


65 x 70.5 x 5 mm
0.2 - 2.5 mm²

CY Series Multiple Connection Terminal Blocks


CY Series Multiple Level Terminal Blocks



CDB6
Input : 6 - 25 sq.mm
Output : 1.5 - 6.0 mm²
82/41 A, 800 V, 3.0 / 0.8 Nm



CDB10
Input : 10 - 35 sq.mm
Output : 1.5 - 10.0 mm²
114/57 A, 800 V, 6.0 / 1.2 Nm



CDB25
Input : 10 - 50 sq.mm
Output : 6.0 - 25.0 mm²
150/75 A, 800 V, 6.0 / 2.0 Nm



CMDB4
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm



CMDB6
1.5 - 6.0 mm²
41 A, 1000 V, 0.8 Nm



CMDB10
1.5 - 10.0 mm²
57 A, 1000 V, 1.2 Nm



CMDB25
6.0 - 25.0 mm²
101 A, 800 V, 2.0 Nm

Distribution Blocks

Distribution Blocks

From 4 Terminal to 10 Terminal Points



CHV6U
62 x 52 x 8 mm
0.2 - 6.0 mm²
41 A, 1000 V, 0.8 Nm



CHV10U
62 x 52 x 10 mm
0.2 - 10.0 mm²
57 A, 1000 V, 1.2 Nm




CTS4USC
62 x 52 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm




CTS6USC
62 x 52 x 8 mm
0.2 - 6.0 mm²
41 A, 1000 V, 0.8 Nm



CTS10USC
62 x 52 x 10 mm
0.2 - 10.0 mm²
57 A, 1000 V, 1.2 Nm



CKT4SPSC
45.3 x 58.5 x 6 mm
0.2 - 4.0 mm²
28 A, 1000 V, 0.5 Nm



CDTTUSC
57 x 63 x 8 mm
1.5 - 10.0 mm²
57 A, 800 V, 1.2 Nm

High Voltage Terminal Blocks

Spring Loaded Terminal Blocks



CTT2.5U
Type 'K' / 'J' / 'T' / 'E'
0.2 - 2.5 mm²
10 A, 1000 V, 0.4 Nm



CTC4U
49.5 x 47 x 6 mm
0.2 - 4.0 mm²
6.3 x 0.8 mm Tab
32 A, 300 V




CDL4U(O)
54 x 55.5 x 6 mm
0.2 - 4.0 mm²
32 A, 500 V, 0.5 Nm



CDL4U(E) (Diode)
54 x 55.5 x 6 mm
0.2 - 4.0 mm²
32 A, 500 V, 0.5 Nm



CDL4U(E) (Neon)
54 x 55.5 x 6 mm
0.2 - 4.0 mm²
32 A, 500 V, 0.5 Nm



CDL4U(E) (LED)
54 x 55.5 x 6 mm
0.2 - 4.0 mm²
32 A, 500 V, 0.5 Nm



CKT4UD1/D2
46 x 46.3 x 6 mm
0.2 - 4.0 mm²
1 A, 500 V, 0.5 Nm

Thermocouple & Tab Connection Terminal Blocks

Terminal Blocks with Electronic Components



CY6
48.2 x 50 x 8 mm
0.2 - 6.0 mm²
41 A, 1000 V, 0.8 Nm



CY10
48.2 x 50 x 10 mm
0.2 - 10.0 mm²
57 A, 1000 V, 1.2 Nm




CYG2.5
48.2 x 50 x 5 mm
0.2 - 2.5 mm²



CYG4
48.2 x 50 x 6 mm
0.2 - 4.0 mm²



CYG6
48.2 x 50 x 8 mm
0.2 - 6.0 mm²



CYG10
48.2 x 50 x 10 mm
0.2 - 10.0 mm²



CY4/3
49.9 x 58.8 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm

CY Series Feed Through Terminal Blocks

CY Series Ground / Earth Terminal Blocks

CY Series Multiple Connection Terminal Blocks



CYDL4
65 x 70.5 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm



CYDL4(I.S)
65 x 70.5 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm




CYDLG4
65 x 70.5 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V, 0.5 Nm



CYDLG4(I.S)
65 x 70.5 x 6 mm
0.2 - 4.0 mm²



CYF4 / CYF4L
71.6 x 58.7 x 6 mm
0.2 - 4.0 mm²
10 A, 1000 V, 0.5 Nm




CYDLF4
90.1 x 94.5 x 6 mm
0.2 - 4.0 mm²
10/32 A, 500 V, 0.5 Nm



CYDLGF4
90.1 x 94.5 x 6 mm
0.2 - 4.0 mm²
10/32 A, 500 V, 0.5 Nm

CY Series Multiple Level Terminal Blocks


CY Series Fuse Terminal Blocks



new

CYDLF4FT

66.8 x 94.5 x 6 mm
0.2 - 4.0 mm²
32 A, 630 V, 0.5 Nm



new

CYDLGF4FT

66.8 x 94.5 x 6 mm
0.2 - 4.0 mm²
32 A, 630 V, 0.5 Nm



new

CYDLF4LR

90.1 x 94.5 x 6 mm
0.2 - 4.0 mm²
10 A, 630 V, 0.5 Nm



new

CYDLGF4LR


90.1 x 94.5 x 6 mm
0.2 - 4.0 mm²
10 A, 630 V, 0.5 Nm



new

CYK4

48.2 x 58.7 x 6 mm
0.2 - 4.0 mm²
28 A, 1000 V, 0.5 Nm



new

CYDLK4

66.8 x 94.5 x 6 mm
0.2 - 4.0 mm²
20/32 A, 630 V, 0.5 Nm




new

CYDLGK4

66.8 x 94.5 x 6 mm
0.2 - 4.0 mm²
20/32 A, 630 V, 0.5 Nm

CY Series Fuse Terminal Blocks

CY Series Disconnect & Test Terminal Blocks




CX4/3

37.4 x 70.5 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V




CX4/4

37.4 x 86.2 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V



CX6/3

42.2 x 82.2 x 8 mm
0.2 - 6.0 mm²
41 A, 1000 V



CX10/3


48.5 x 97 x 10 mm
0.2 - 10.0 mm²
57 A, 1000 V



new


CSC16/3T

50.8 x 120 x 12 mm
1.5 - 16.0 mm²
76 A, 800 V



CX2.5/4P

37.4 x 74.7 x 5 mm
0.2 - 2.5 mm²
1000 V




CX2.5/4(E)D1 / D2

37.4 x 74.7 x 5 mm
0.2 - 2.5 mm²
1000 V

'CX' Series Multiple Connection Terminal Blocks

'CX' Series Diode Terminal Blocks




CXG4/3

37.4 x 70.5 x 6 mm
0.2 - 4.0 mm²




CXG4/4

37.4 x 86.2 x 6 mm
0.2 - 4.0 mm²



CXG6/3

42.2 x 82.2 x 8 mm
0.2 - 6.0 mm²



CXG10/3


48.5 x 97 x 10 mm
0.2 - 10.0 mm²



new


CSCG16/3T

50.8 x 120 x 12 mm
1.5 - 16.0 mm²



CXDL2.5

48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V




CXDL2.5(I.S)

48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V


'CX' Series Ground / Earth Multiple Connection Terminal Blocks

'CX' Series Multiple Level Terminal Blocks




CXDL2.5(E)DD1 / DD2

48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
1 A, 1000 V




CXDL2.5(E)DD3 / DD4

48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
1 A, 1000 V




CXDL2.5(E)LD1

48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
1000 V



CXDL2.5(E)TS1

48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²



CXF4 / CXF4L


60.7 x 65.4 x 6 mm
0.2 - 4.0 mm²
10 A, 1000 V



new

CXVF / CXVF2.5#

52.2 x 75 x 12 mm
0.2 - 10.0 mm²
10 A, 1000 V



CXF4/3

60.7 x 86.2 x 6 mm
0.2 - 4.0 mm²
10 A, 1000 V

'CX' Series Double Level with Electronic Component Terminal Blocks


'CX' Series Fuse Terminal Blocks

* Product height varies as per the fuse changes.




CMS2.5

29.5 x 31 x 5 mm
0.2 - 4.0 mm²
24 A, 800 V




CXs2.5

42.5 x 45.9 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V




CXs4

42.5 x 45.9 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V




CXSG2.5

42.5 x 45.9 x 5 mm
0.2 - 2.5 mm²




CXSG4

42.5 x 45.9 x 6 mm
0.2 - 4.0 mm²



CXDB35/10 / CXDB35/10A

46.6 x 81.6 x 16 mm
Input: 1.5 - 35.0 mm²
Output: 0.2 - 10.0 mm²
125/41 A, 1000 V, 2.5 Nm



CXCC4

37.4 x 65.4 x 6 mm
0.2 - 4.0 mm²
*A, 1000 V


Micro Terminal Blocks

'CX' Series Side Entry Terminal Blocks


'CX' Series Side Entry Ground / Earth Terminal Blocks

Compact Hybrid Distribution Block


Component Carrier Terminal Block




CX2.5
37.4 x 50 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V




CX4
37.4 x 54.8 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V




CX6
42.2 x 62.1 x 8 mm
0.2 - 6.0 mm²
41 A, 1000 V




CX10
48.5 x 71.7 x 10 mm
0.2 - 10.0 mm²
57 A, 1000 V



CSC16T
50 x 82 x 12 mm
1.5 - 16.0 mm²
76 A, 800 V



CX2.5/3
37.4 x 62.5 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V




CX2.5/4
37.4 x 74.7 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V

'CX' Series Feed Through Terminal Blocks


'CX' Series Multiple Connection Terminal Blocks



CXG2.5
37.4 x 50 x 5 mm
0.2 - 2.5 mm²




CXG4
37.4 x 54.8 x 6 mm
0.2 - 4.0 mm²



CXG6
42.2 x 62.1 x 8 mm
0.2 - 6.0 mm²



CXG10
48.5 x 71.7 x 10 mm
0.2 - 10.0 mm²



CSCG16T
50 x 82 x 12 mm
1.5 - 16.0 mm²




CXG2.5/3
37.4 x 62.5 x 5 mm
0.2 - 2.5 mm²




CXG2.5/4
37.4 x 74.7 x 5 mm
0.2 - 2.5 mm²

'CX' Series Ground / Earth Terminal Blocks

'CX' Series Ground / Earth Multiple Connection Terminal Blocks



CXDLG2.5
48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V



CXDLG2.5(I.S)
48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²



ATL2.5H
74 x 76.1 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V




ATLG2.5
74 x 100 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V



ADLG2.5
63.5 x 83.7 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V



ATL2.5
74 x 100 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V



CXDL2.5(E)D1/D2
48.7 x 72.7 x 5 mm
0.2 - 2.5 mm²
1 A, 1000 V


'CX' Series Multiple Level Terminal Blocks

'CX' Series Double Level with Electronic Component Terminal Blocks

new



CXAF4/3
42.4 x 86.2 x 6 mm
0.2 - 4.0 mm²
10 A, 1000 V




CXK2.5
41.5 x 62.2 x 5 mm
0.2 - 2.5 mm²
20 A, 1000 V




CXK2.5/4
41.5 x 74.7 x 5 mm
0.2 - 2.5 mm²
20 A, 1000 V



CXK4
41.5 x 65.7 x 6 mm
0.2 - 4.0 mm²
22 A, 1000 V



CXK4/3
41.5 x 86.2 x 6 mm
0.2 - 4.0 mm²
28 A, 1000 V



CXM2.5
34 x 37 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V



CXMG2.5
34 x 37 x 5 mm
0.2 - 2.5 mm²

'CX' Series Disconnect & Test Terminal Blocks

Micro Terminal Blocks

new

new


new

new


new

new


new




CX2.5/1B
37 x 50.8 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V



CX2.5/2B
37 x 50.8 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V




CX2.5/3/1B
37 x 63 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V




CX2.5/4/2B
37 x 83.5 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V



CX2.5/4/4B
37 x 97.2 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V










CXDL2.5/2B
48.7 x 78 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V




CXDL2.5/2B(I.S)
48.7 x 78 x 5 mm
0.2 - 2.5 mm²
24 A, 500 V

Pluggable Terminal Blocks

new  CXG2.5/1B 37 x 50.8 x 5 mm 0.2 - 2.5 mm ²	new  CXG2.5/2B 37 x 50.8 x 5 mm 0.2 - 2.5 mm ²	new  CXG2.5/3/1B 37 x 63 x 5 mm 0.2 - 2.5 mm ²	new  CXG2.5/4/2B 37 x 83.5 x 5 mm 0.2 - 2.5 mm ²	new  CXG2.5/4/4B 37 x 97.2 x 5 mm 0.2 - 2.5 mm ²	new  CXDLG2.5/2B 48.7 x 78 x 5 mm 0.2 - 2.5 mm ²	new  CXDLG2.5/2B(I.S) 48.7 x 78 x 5 mm 0.2 - 2.5 mm ²
---	---	---	---	--	---	--

Pluggable Terminal Blocks

 AS4/3 42 x 61.5 x 6 mm 0.2 - 4.0 mm ² 32 A, 800 V	 AS4/4 42 x 61.5 x 6 mm 0.2 - 4.0 mm ² 32 A, 800 V	 AS6/3 48 x 74 x 8 mm 0.2 - 6.0 mm ² 41 A, 800 V	 AGT2.5 42 x 54 x 5 mm 0.34 - 2.5 mm ²	 AGT4 42 x 61.5 x 6 mm 0.2 - 4.0 mm ²	 AGT6 48 x 74 x 8 mm 0.2 - 6.0 mm ²	 AGT2.5/3 42 x 54 x 5 mm 0.34 - 2.5 mm ²
--	---	---	--	--	---	--

Angular Spring Clamp Multiple Connection Terminal Blocks

Angular Ground / Earth Terminal Blocks








Angular Ground / Earth Multiple Connection Terminal Blocks

 CM2.5S / CM2.5S2 20 x 30 x 6 mm / 10 mm 0.34 - 2.5 mm ² 24 A, 500 V	 CM4S / CM4S2 23 x 33.7 x 7 mm / 12 mm 0.2 - 4.0 mm ² 32 A, 630 V	 CXCP2.5/4 33 x 38 x 10 mm 0.2 - 2.5 mm ² 24 A, 1000 V	new  CP1.5 31 x 45.3 x 3.5 mm 0.2 - 1.5 mm ² 16 A, 800 V	new  CP2.5 37.4 x 49.7 x 5 mm 0.2 - 2.5 mm ² 24 A, 1000 V	new  CP4 37.4 x 54.8 x 6 mm 0.2 - 4.0 mm ² 32 A, 1000 V	new  CP6/10 42.2 x 62.75 x 8 mm 0.5 - 10.0 mm ² 57 A, 1000 V
---	--	---	--	--	---	--





Panel Mount Terminal Blocks

'CX' Series Feed Through Terminal Blocks

'CP' Series Push-In Feed Through Terminal Blocks

new  CPG1.5 31 x 45.3 x 3.5 mm 0.2 - 1.5 mm ²	new  CPG2.5 37.4 x 49.7 x 5 mm 0.2 - 2.5 mm ²	new  CPG4 37.4 x 54.8 x 6 mm 0.2 - 4.0 mm ²	new  CPG6/10 42.2 x 62.75 x 8 mm 0.5 - 10.0 mm ²	new  CPG1.5/3 31 x 54.5 x 3.5 mm 0.2 - 1.5 mm ²	new  CPG1.5/4 31 x 63.5 x 3.5 mm 0.2 - 1.5 mm ²	new  CPG2.5/3 37.4 x 62.5 x 5 mm 0.2 - 2.5 mm ²
--	--	--	---	---	--	--

'CP' Series Push-In Ground / Earth Terminal Blocks

new  CPDLG1.5(I.S) 44 x 67.2 x 3.5 mm 0.2 - 1.5 mm ²	new  CPDL2.5 48.7 x 72.7 x 5 mm 0.2 - 2.5 mm ² 24 A, 1000 V	new  CPDL2.5(I.S) 48.7 x 72.7 x 5 mm 0.2 - 2.5 mm ² 24 A, 1000 V	new  CPDLG2.5 48.7 x 72.7 x 5 mm 0.2 - 2.5 mm ² 24 A, 1000 V	new  CPDLG2.5(I.S) 48.7 x 72.7 x 5 mm 0.2 - 2.5 mm ²	new  CP3L2.5 81.9 x 98.7 x 5 mm 0.34 - 2.5 mm ² 24 A, 500 V	new  CP3L2.5(I.S) 81.9 x 98.7 x 5 mm 0.34 - 2.5 mm ² 24 A, 500 V
--	---	--	--	--	---	--

'CP' Series Push-In Double Level Terminal Blocks

'CP' Series Push-In Multiple Level Terminal Blocks

new



CX2.5SN

40 x 18 x 5 mm
0.2 - 2.5 mm²
24 A, 800 V

new



CX2.5PN

42 x 17.5 x 5 mm
0.2 - 2.5 mm²
24 A, 800 V




AS2.5

42 x 54 x 5 mm
0.34 - 2.5 mm²
24 A, 800 V




AS4

42 x 61.5 x 6 mm
0.2 - 4.0 mm²
32 A, 800 V



AS6

48 x 74 x 8 mm
0.2 - 6.0 mm²
41 A, 800 V



AS2.5/3

42 x 54 x 5 mm
0.34 - 2.5 mm²
24 A, 800 V



AS2.5/4

42 x 54 x 5 mm
0.34 - 2.5 mm²
24 A, 800 V

Pluggable Terminal Blocks


**Angular Spring Clamp
Feed Through Terminal Blocks**

**Angular Spring Clamp Multiple
Connection Terminal Blocks**



AGT2.5/4

42 x 54 x 5 mm
0.34 - 2.5 mm²



AGT4/3

42 x 61.5 x 6 mm
0.2 - 4.0 mm²




AGT4/4

42 x 61.5 x 6 mm
0.2 - 4.0 mm²




AGT6/3

48 x 74 x 8 mm
0.2 - 6.0 mm²




CSCP2.5T

27.3 x 35 x 5 mm
0.2 - 2.5 mm²
24 A, 800 V



CSCP2.5T2

27.3 x 35 x 10 mm
0.2 - 2.5 mm²
24 A, 800 V




CM1.5S / CM1.5S2

18 x 26.5 x 5 mm / 8 mm
0.2 - 1.5 mm²
17 A, 500 V

**Angular Ground / Earth
Multiple Connection Terminal Blocks**

Panel Mount Terminal Blocks


new



CP1.5/3

31 x 54.5 x 3.5 mm
0.2 - 1.5 mm²
16 A, 800 V


new



CP1.5/4

31 x 63.5 x 3.5 mm
0.2 - 1.5 mm²
16 A, 800 V

new



CP2.5/3

37.4 x 62.5 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V


new



CP2.5/4

37.4 x 73 x 5 mm
0.2 - 2.5 mm²
24 A, 1000 V


new



CP4/3

37.4 x 70.5 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V

new



CP4/4

37.4 x 86.2 x 6 mm
0.2 - 4.0 mm²
32 A, 1000 V

new




CP6/10/3

42.2 x 82.5 x 8 mm
0.5 - 10.0 mm²
57 A, 1000 V

'CP' Series Push-In Multiple Connection Terminal Blocks


new



CPG2.5/4

37.4 x 73 x 5 mm
0.2 - 2.5 mm²


new



CPG4/3

37.4 x 70.5 x 6 mm
0.2 - 4.0 mm²


new



CPG4/4

37.4 x 86.2 x 6 mm
0.2 - 4.0 mm²

new



CPG6/10/3

42.2 x 82.85 x 8 mm
0.5 - 10.0 mm²

new



CPDL1.5

44 x 67.2 x 3.5 mm
0.2 - 1.5 mm²
16 A, 800 V


new



CPDL1.5(I.S)

44 x 67.2 x 3.5 mm
0.2 - 1.5 mm²
16 A, 800 V

new



CPDLG1.5

44 x 67.2 x 3.5 mm
0.2 - 1.5 mm²
16 A, 800 V

'CP' Series Push-In Ground / Earth Terminal Blocks

'CP' Series Push-In Double Level Terminal Blocks


new



CP3LG2.5

81.9 x 98.7 x 5 mm
0.34 - 2.5 mm²
24 A, 500 V

new



CP3LG2.5(I.S)

81.9 x 98.7 x 5 mm
0.34 - 2.5 mm²


new



CP4LG2.5

91.7 x 118.6 x 5 mm
0.34 - 2.5 mm²
24 A, 500 V


new



CPDLK2.5

49.1 x 107.25 x 5 mm
0.2 - 2.5 mm²
16 A, 500 V

new



CPDLK2.5(I.S)

49.1 x 107.25 x 5 mm
0.2 - 2.5 mm²
16 A, 500 V


new



CPDLKFT2.5

49.1 x 107.25 x 5 mm
0.2 - 2.5 mm²
16 A, 500 V

new








CPDLKFT2.5(I.S)

49.1 x 107.25 x 5 mm
0.2 - 2.5 mm²
16 A, 500 V




**'CP' Series Push-In
Multiple Level Terminal Blocks**

'CP' Series Push-In Disconnecting Terminal Blocks




 new CPST1.5/3 46.8 x 79.8 x 3.5 mm 0.2 - 1.5 mm² 13.5 A, 250 V	 new CPST1.5/4 46.8 x 96.5 x 3.5 mm 0.2 - 1.5 mm² 13.5 A, 250 V	 new CPSTG1.5/4 46.8 x 96.5 x 3.5 mm 0.2 - 1.5 mm² 13.5 A, 250 V	 new CPPT2.5/3 47.2 x 79.8 x 7 mm 0.2 - 2.5 mm² 20 A, 250 V	 new CPPT2.5/4 47.2 x 96.5 x 7 mm 0.2 - 2.5 mm² 20 A, 250 V	 new CPPTG2.5/4 47.2 x 96.5 x 7 mm 0.2 - 2.5 mm² 20 A, 250 V	 new CP8L32 83.2 x 120 x 9 mm 0.2 - 1.5 mm² 8 A, 320 V
---	---	--	---	--	--	--

'CP' Series Push-In Sensor & Actuator Terminal Blocks

'CP' Series Push-In
Marshalling
Terminal Blocks




 CSB3/N3UL 37 x 49 x 9 mm 0.5 - 6.0 mm² 41 A, 800 V, 0.5 Nm	 new CSB3/N3USH 37 x 49 x 9 mm 0.5 - 6.0 mm² 41 A, 800 V, 0.5 Nm	 CBS4U / CBS5U 37 x 49 x 13 mm 1.5 - 10.0 / 1.5 - 10.0 mm² 57 / 76 A, 1100 V, 1.2 / 2.0 Nm	 CSB4/N4U / CSB5/N5U 37 x 49 x 13 mm 1.5 - 10.0 / 1.5 - 16.0 mm² 57 / 76 A, 1100 V, 1.2 / 2.0 Nm	 new CSB4/N4USH / CSB5/N5USH 37 x 49 x 13 mm 1.5 - 10.0 / 1.5 - 16.0 mm² 57 / 76 A, 1000 V, 1.2 Nm	 CSTSN4U / CSTSN5U 39.5 x 50 x 17 mm 1.5 - 10.0 / 1.5 - 16.0 mm² 57 / 76 A, 1000 V, 1.2 / 2.0 Nm	 CSTSN6U 39.5 x 50 x 17 mm 1.5 - 35.0 mm² 125 A, 1000 V, 3.0 Nm
--	--	--	--	---	--	---

Stud Type Feed Through Terminal Blocks

 CBB95 / CBB95LS 46 x 92 x 38 mm 16.0 - 95.0 mm² 232 A, 1000 V, 10.0 Nm	 CBB120 / CBB120LS 46 x 100 x 48 mm 16.0 - 120.0 mm² 269 A, 1000 V, 10.0 Nm	 CBB150 / CBB150LS 46 x 110 x 48 mm 16.0 - 150.0 mm² 309 A, 1000 V, 14.0 Nm	 CBB185 / CBB185LS 46 x 110 x 48 mm 16.0 - 185.0 mm² 353 A, 1000 V, 14.0 Nm	 PTB35/50 / PTB35/50SH 62 x 113 x 25 mm / 65 x 169 x 25 mm 1.5 - 50.0 mm² 150 A, 1000 V, 3.0 Nm	 PTB70/95 / PTB70/95SH 75 x 130 x 32 mm / 77 x 192 x 32 mm 1.5 - 95.0 mm² 232 A, 1000 V, 10 Nm	 CTS2.5(M) 44 x 36.5 x 6 mm 0.2 - 2.5 mm² 24 A, 800 V, 0.4 Nm
--	---	---	---	--	--	---

Power Terminal Blocks

Melamine
Feed Through
Terminal Blocks

 CSTSB5 44.5 x 50 x 13 mm 1.5 - 16.0 mm² 76 A, 1000 V, 2.0 Nm	 CSTSN5 44.5 x 50 x 17 mm 1.5 - 16.0 mm² 76 A, 1000 V, 2.0 Nm	 CSTSN6 44.5 x 50 x 17 mm 1.5 - 35.0 mm² 125 A, 1000 V, 3.0 Nm	 CSTSN4(15)/N5(15) 44.5 x 50 x 15 mm 1.5 - 10.0 / 1.5 - 16.0 mm² 57 A/76 A, 1000 V, 1.2/2.0 Nm	 CSTSRN5 / CSTSRN6 49 x 43 x 26 mm 1.5 - 16.0 / 1.5 - 35.0 mm² 76 / 125 A, 1100 V, 2.0 / 3.0 Nm	 CMDT4 49 x 68 x 13 mm 1.5 - 6.0 mm² 41 A, 1100 V, 1.2 Nm	 CMDT4SH 49 x 68 x 26 mm 1.5 - 6.0 mm² 32 A, 500 V, 1.2 Nm
---	---	--	--	--	---	--

Melamine Stud Type Terminal Blocks

Melamine Disconnect & Test Terminal Blocks

 CB4 18.5 x 25 x 11 mm 0.2 - 2.5 mm² 24 A, 1000 V, 0.4 Nm	 CB6 19 x 25 x 12 mm 0.5 - 4.0 mm² 32 A, 1000 V, 0.5 Nm	 CB16 23.5 x 28.5 x 31 mm 1.5 - 10.0 mm² 57 A, 800 V, 1.2 Nm	 CMPS600BASIC Cat. No.: PL-34130098 Marker Plotting System	 CMPS600 Cat. No.: PL-34130099 Marker Plotting System	 VE600 Cat. No.: PL-34000083 Label Engraving System	 End Clamp / End Stop
---	---	--	---	---	--	--

Ceramic Terminal Blocks

Plotter System

Accessories


new



CP8L32(I.S)

83.2 x 120 x 9 mm
0.2 - 1.5 mm²
8 A, 320 V

new



CP8L32(I.S)H

83.2 x 120 x 9 mm
0.2 - 1.5 mm²
8 A, 320 V




STH3

46 x 47 x 9 mm
1.5 - 6.0 mm²
41 A, 1000 V, 0.5 Nm




STH4 / STH4TP

50.5 x 46 x 11 mm
1.5 - 6.0 mm²
41 A, 1000 V, 1.2 Nm




STH6

62.2 x 63.5 x 18 mm
1.5 - 35.0 mm²
125 A, 1000 V, 3.0 Nm



CBS3U

37 x 49 x 9 mm
0.5 - 6.0 mm²
41 A, 1100 V, 0.5 Nm



CSB3/N3U

37 x 49 x 9 mm
0.5 - 6.0 mm²
41 A, 1100 V, 0.5 Nm

'CP' Series Push-In Marshalling Terminal Blocks

Stud Type Feed Through Terminal Blocks


Stud Type Feed Through Terminal Blocks

new




CSTSN6USH

39.5 x 50 x 17 mm
1.5 - 35.0 mm²
125 A, 1000 V, 3.0 Nm




CSE5U

39.5 x 50 x 17 mm
1.5 - 16.0 mm²
76 A, 800 V, 2.0 Nm




STH4DT / STH4DTSH

50 x 86 x 11 / 22 mm
1.5 - 6.0 mm²
41 / 34 A, 1000 V, 1.2 Nm



STH4DTFT

50.5 x 86 x 11 mm
1.5 - 6.0 mm²
41 A, 1000 V, 1.2 Nm



CBDT4U

49 x 71 x 13 mm
1.5 - 6.0 mm²
41 A, 1100 V, 1.2 Nm



CBB35/50 / CBB35/50LS

46 x 75 x 32 mm
6.0 - 50.0 mm²
150 A, 1000 V, 3.0 Nm



CBB70 / CBB70LS

46 x 92 x 38 mm
6.0 - 70.0 mm²
192 A, 1000 V, 6.0 Nm

Stud Type Feed Through Terminal Blocks

Stud Type Disconnect & Test Terminal Blocks

Power Terminal Blocks



CTS2.5

49 x 40 x 6.7 mm
0.2 - 4.0 mm²
32 A, 800 V, 0.5 Nm




CTS6

49 x 40 x 8 mm
1.5 - 6.0 mm²
41 A, 1000 V, 0.8 Nm




CTS10

49 x 40 x 10 mm
1.5 - 10.0 mm²
57 A, 1000 V, 1.2 Nm




CTS16

55 x 50 x 12 mm
6.0 - 16.0 mm²
76 A, 1000 V, 1.2 Nm




CTS35

64.5 x 58 x 18 mm
10.0 - 35.0 mm²
125 A, 1100 V, 2.5 Nm



CSTSB3

44.5 x 50 x 10 mm
1.5 - 6.0 mm²
41 A, 1100 V, 0.5 Nm



CSTSB4/N4

30 x 45 x 13 mm
1.5 - 10.0 mm²
57 A, 1100 V, 1.2 Nm

Melamine Feed Through Terminal Blocks

Melamine Stud Type Terminal Blocks




CTS35L / CTS35LS

52.5 x 75 x 28 mm
16.0 - 50.0 mm²
150 A, 1000 V, 3.0 Nm



CTS70L / CTS70LS

52.5 x 92 x 40 mm
35.0 - 70.0 mm²
192 A, 1000 V, 10.0 Nm




CTS95L / CTS95LS

52.5 x 92 x 40 mm
35.0 - 95.0 mm²
232 A, 1000 V, 10.0 Nm



CMST1 / CMST2

16 x 110 x 15 mm
0.2 - 2.5 mm²
24 A, 400 V, 0.4 Nm



CTS4SC

49 x 40 x 6.7 mm
0.2 - 4.0 mm²
32 A, 600 V, 0.5 Nm



CTS6SC

49 x 40 x 8 mm
1.5 - 6.0 mm²
41 A, 600 V, 0.8 Nm




CTS10SC

57 x 50 x 11 mm
1.5 - 10.0 mm²
57 A, 800 V, 1.2 Nm


Melamine Bus Bar Type Terminal Blocks

Multiway Strip Terminal Blocks
12 Pole / way

Melamine Spring Loaded Terminal Blocks




Mounting Rails



Mounting Bracket / Base & Mounting Handle



End / Partition / Separator Plates



Marking Tags, Group Marker



Cross Connecting Accessories and Test Socket



Protective Cover



Mounting Plate

Accessories

(Refer our Terminal Blocks catalogue for more details)



CDINS6 / CDINS16
49 x 68 x 60 mm
0.5 - 2.5 mm²
6 A / 16 A, 250 V



CDINSW1 / CDINSW2
53 x 82 x 60 mm
0.5 - 2.5 mm²
6 A, 250 V



CDINSW2
53 x 82 x 60 mm
0.5 - 2.5 mm²
16 A, 250 V



CDINSD
53 x 82 x 60 mm
0.5 - 2.5 mm²
16 A, 250 V



Standard Single Phase
5 - 480 Watts
5 / 12 / 24 / 48 VDC



Two & Three Phase
100 - 960 Watts
12 / 24 / 48 VDC

Din Rail Mounted Sockets & Switches

Switching Power Supplies



DIN Profile Single Phase
7.5 - 100 Watts
5 / 12 / 24 VDC




Redundancy Module
10 / 20 Watts
24 VDC



Professional Screwdrivers
For Slotted Screws & Phillips Recess Screw



Socket wrench Nut Driver
For Hexagon headed screws, bolts & nuts



MT73 / MT108 Mounting Track



Mounting Feet
End Section for DIN Rail Mount
End Section for Panel Mount

Switching Power Supplies

Connectwell Tools

Interface Module Accessories


(for 73 / 75 & 108 / 111.6 mm PCB)

Relay Module with Electro-Mechanical Relays



Change Over: 1CO/2CO/4CO
No. of Relays: 1/2/4/8/16
Coil volt: DC: 5/12/24, AC: 24A/110A/230A
Switching Current: 5 A (2CO/ 4CO) / 10 A (1CO)
Max. Switching Voltage: 380 VAC, 125 VDC
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting

Relay Module with Fuse Protection I/P & O/P



Change Over: 1CO/2CO/4CO
No. of Relays: 1/2/4/8/16
Coil Volt: DC: 5/12/24, AC: 24A/110A/230A
Switching Current: 5 A (2CO) / 10 A (1CO)
Max. Switching Voltage: 380 VAC, 125 VDC
Fuse rating up to 6.3 A
Standard Screw Terminal (0.5 to 2.5 sq.mm)

Relay Module with Fuse Protection & Fuse Fail Indication



Change Over: 1CO/2CO/4CO
No. of Relays: 1/2/4/8/16
Coil Volt: DC: 5/12/24, AC: 24A/110A/230A
Switching Current: 5 A (2CO) / 10 A (1CO)
Max. Switching Voltage: 380 VAC, 125 VDC
Fuse Fail Indication: 24, 110VAC/VDC, 230 VDC/VAC.
Standard Screw Terminal (0.5 to 2.5 sq.mm)

Relay Module with SSR



No. of Relays: 1/2/4/8/16
INPUT: 5/12/24 VDC
OUTPUT:
2A/100VDC (DC/DC SSR)
3A/400 VAC (DC/AC SSR).
Standard Screw Terminal (0.5 to 2.5 sq.mm)

Relay Module with SSR & Fuse Protection at Output



No. of Relays: 1/2/4/8/16
INPUT: 5/12/24 VDC
OUTPUT: 2A/100VDC (DC/DC SSR)
3A/400 VAC (DC/AC SSR)
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Fuse rating up to 6.3 A

Modular Relay



Coil Voltage: DC: 24 AC: 24A/110A/230A
Contact: 1CO/ 2CO/4CO
Switching Current: 12A (1CO) / 8 A (2 CO) / 5A (4CO)
Standard Din Rail Mounting

Slim Relay **new**



Pitch 6.2 mm
CSR Series
Coil Voltage: 5 V DC to 230 V AC/DC
CSER Series
Input: 24 to 230 VAC/DC
Output: 48VDC/4A, 48VDC/100 mA, 380 VAC /2A
Standard Screw / Spring clamp

IDC / FRC Module



Channels / Pins: 10,14,16,20,26,34,40,50,60,64
Versions: Screw connection, Spring Connection,
With LED indication, with component mounting hole.
Rated current: 2 A.
Standard Din Rail Mounting

Male & Female DSUB Modules



Channels / Pins: 9, 15, 25, 37, 50
Versions: Screw connection, Spring Connection,
with LED indication, with component mounting hole.
Rated current: 3 A.
Standard Din Rail Mounting

RJ45 Modules



Orientation: Vertical & Horizontal
Shielded / Non-Shielded.
Rated current: 1.25 A.
Standard Din Rail Mounting.

Diode & Lamp Test Modules



Diode: 1N4007
Forward current: 1 A
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting.

Varistor Modules



No of channels: 3 & 8
Voltages: 50/130/275V, Varistor Type: 14 mm
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting.

Fuse Module with fuse fail indication




Horizontal fuse holder 5x20
Fuse ratings (A): 0.1,0.5,0.63,1,2,3,4,5,6,6.3
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting.

Component Carrier Modules




No of channels: 4/8/12/16/20/24
Rated Current / Channel: 10 A (Max)
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting.

Opto-Transistor Interface Module



High speed switching, Optical Isolation
Rated current: 2 A
Suitable for inductive load switching (Solenoid valve)
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting

CNC Modules



24 IN / 16 OUT Module
Coil Voltage: 24VDC
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting.

1CO & 2CO Rectifier Module



No. of Relays: 1/2/4/8/16, Coil Volt: 24A/110A/230A
Switching Current: 10 A (1CO) / 5 A (2CO)
Max. Switching Voltage: 380 VAC, 125 VDC
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting

1CO & 2CO Common Negative Module



Change Over: 1CO/2CO, No. of Relays: 4/8/16
Coil Bolt: DC: 5/12/24, AC: 110A/230A
Switching Current: 5 A (2CO/4CO) / 10 A (1CO)
Max. Switching Voltage: 380 VAC, 125 VDC
Standard Screw Terminal (0.5 to 2.5 sq.mm)
Standard Din Rail Mounting

*Refer Datasheet for details.

Disclaimer:

- Connectwell reserves the right to amend this catalogue without any prior notice.
- No legal liability will be accepted by Connectwell for any errors, omissions or amendments in this catalogue.
- This catalogue may not be used or reproduced in any other form or manner without prior approval from Connectwell.

MKT/8.2/02 June 2019 x.5000


VIRTUAL **config**

DESIGN

DOCUMENT


MANUFACTURE

DELIVER

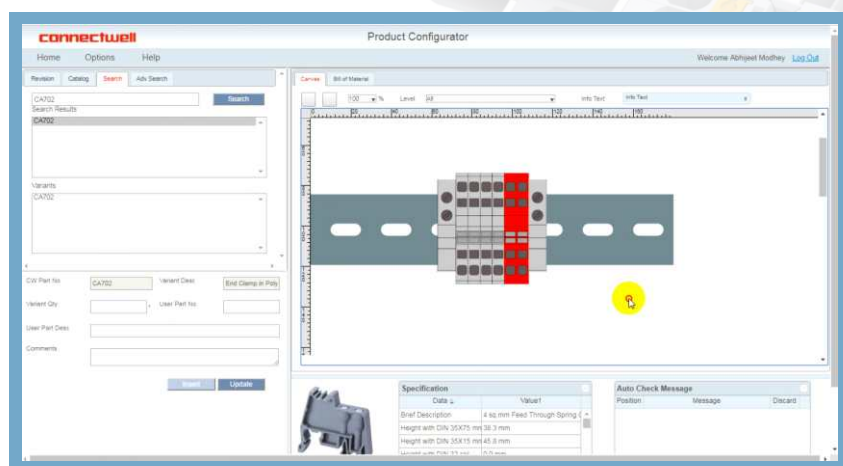

<http://www.connectwell.com/Global/product-configurator.aspx>

- > Free online tool for Terminal Block configuration
- > Easy to use software, menu driven, no CAD licencing required
- > 2D & 3D output drawing generation
- > Complete BOM documentation
- > Short manufacturing lead time
- > Standardized packaging for configured rail assemblies

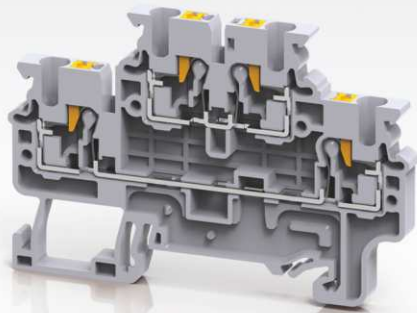

CONNECTWELL INDUSTRIES PVT. LTD.

D-7, Phase 2, M.I.D.C., Dombivli - 421 204, India

Tel.: + 91 251 7120 600 / 6762 600

Fax : + 91 251 7120 700

connect@connectwell.com | www.connectwell.com